

1248106

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office

*November 10, 2004*

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/589,366  
FILING DATE: *July 20, 2004*  
RELATED PCT APPLICATION NUMBER: *PCT/US04/34289*

Certified by



Jon W Dudas

Acting Under Secretary of Commerce  
for Intellectual Property  
and Acting Director of the U.S.  
Patent and Trademark Office

BEST AVAILABLE COPY

22713 U.S. PTO

PTO/SB/16 (01-04)

Approved for use through 07/31/2006. CMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. **ER 614376 813 US**

U.S. PTO  
60/589366

072004

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
ALVIN S.		BLUM		FORT LAUDERDALE	
Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number: <b>27321</b>					
OR					
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State		Zip	
Country		Telephone		Fax	
		<b>954/625006</b>		<b>954/625006</b>	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages <b>5</b>		<input type="checkbox"/> CD(s), Number _____			
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets <b>10</b>		<input type="checkbox"/> Other (specify) _____			
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE Amount (\$)	
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees.				<b>80</b>	
<input type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: _____					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

[Page 1 of 2]

Respectfully submitted,

SIGNATURE

*Alvin S. Blum*

TYPED or PRINTED NAME

ALVIN S. BLUM

TELEPHONE

954 462 5006

Date

7/19/2004

REGISTRATION NO.

30,448

(if appropriate)

Docket Number:

B70419

**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

### **WORLD GLOBE WITH DETAIL DISPLAY 3**

This invention relates to geographic displays, and more particularly to a world globe with an accessory detailed display of a selected region of the globe.

#### **BACKGROUND OF THE INVENTION**

Spherical globes that have imprinted on their surface the map of the world are well known. They are generally provided with an axle through their north and south poles. They may be mounted on a base by the axle, so that they may be rotated for viewing a selected area. U S Patent #6,625,086 issued 9/23/2003 to Kim discloses a globe with a rotation sensor on the axle. A pointer indicates a longitude position at a particular time zone on the globe. The sensor feeds the rotation information into an electronic processor and a display indicates a major city in that time zone and also displays the current time in that time zone.

Navigational aids for providing maps in vehicles and on computers have detailed maps stored on a memory such as a computer disc. The information is retrieved by inputting some location data. This enables selection of particular map information from the memory to be displayed on a computer monitor or a small monitor, such as a battery operated liquid crystal display in a vehicle.

Globes can be imprinted with a great deal of geographic information. However, unless the world globe is very large, the details are not easily read. Because a globe is spherical, it is awkward and expensive to have a large one. It is much less awkward and costly to have detailed planar maps. They may also be more easily updated. Flat and folded maps are very useful, but they lack the perspective given by the globe.

#### **SUMMARY OF THE INVENTION**

It is accordingly an object of the invention to provide a world globe with geographic features thereon that rotates on an axle through the north and south poles with the axle mounted on a base. The globe is not large enough to legibly carry all of the geographic and map information that the invention provides. Additional detailed information of a selected area of the globe is provided on a display attached to the globe either on the base or at another location. Detailed information, much more than can be imprinted even on a large globe, is stored on a memory such as, but not limited to, a compact disc. Input to the memory to select a detailed map of a particular area of the globe to be displayed on the display is provided by a longitudinal

signal and a latitudinal signal. . A rotary position sensor adapted to sense the rotary position of the globe on the rotational axis through the north and south poles provides an east/west longitude signal. An indicator such as a transparent pointer, a light beam, or a reticle is provided at or adjacent the globe surface. Mounting means for the indicator provides for relative motion between the globe and the indicator along a north/ south meridian in an arc concentric with the globe, thereby maintaining its position at or adjacent the globe surface. A second sensor detecting the north/south location of the indicator provides the latitude signal. The two signals enable the system to select the appropriate detailed map of that latitude and longitude from the memory and to enable it to be displayed on the display. Another feature may enable the display of a more or less magnified map if desired.

These and other objects, features, and advantages of the invention will become more apparent when the detailed description is studied in conjunction with the drawings in which like elements are designated by like reference characters in the various drawing figures.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a front elevation view of the invention.

Fig. 2 is schematic representation of the invention.

Fig. 3 is a front elevation view of another embodiment of the invention.

Fig. 4 is front elevation view of the embodiment of Fig.3 with the display panel removed.

Fig. 5 is a side elevation view of another embodiment of the invention.

Fig. 6 is a front elevation view of another embodiment of the invention.

Fig. 7 is a front elevation view of another embodiment of the invention.

Fig. 8 is a sectional view through line 8-8 of Fig. 7.

Fig. 9 is a sectional view taken through line 9-9 of Fig. 8.

Fig. 10 is a sectional view through line 10-10 of Fig. 9.

#### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

Referring now to the drawing Figs. 1-2, a globe 18 of the invention includes a sphere 4 imprinted with geographic indicia 17 representing earth on its surface. The sphere is supported on an axle element 2 that is attached to support base 1. The sphere rotates about an axis 3 through the north pole 6 and the south pole 7. A meridian member 5 extends between the two poles. An indicator 8 such as an arrow pointer is slidably mounted on the meridian member for

north/south motion of the tip of the indicator on the sphere. By rotation of the sphere in the east/west direction and motion of the indicator in the north/south direction, a particular area of the earth is located. A signal 13 from a first sensor 10 sensing rotation of the sphere and therefor longitude information, and a signal 14 from the second sensor 11 sensing sliding position of the indicator and therefor latitude information of the selected area are fed to control circuit 19. Circuit 19 selects a particular portion of the memory 12 corresponding to the selected area. That detailed map information 16 is displayed on the display 15. The memory 12 may be any of the memory media well known in the art. It may be easily replaced with updated information, or with another language. Control buttons 20 and 21 select low and high magnification map displays. Button 22 moves the display to an area east, and button 23 moves the display to an area west. Button 25 moves to an area north, and button 26 moves to an area south. These functions are well known in the vehicle navigation and computer map display art. Button 24 displays the current time at the selected area. An internal clock 29 is set by positioning the indicator 8 at a location where the time is known, then entering the correct time using the hour button 27 and minute button 28. When moved to a different time zone, the system displays the time corrected to that time zone. Electric power is supplied through power cord 30.

Referring now to Figs. 3 and 4, another embodiment 18' of the invention is shown in which the display panel 15' is mounted on the base 1' to display a detailed map 16' and the time 31 at the location indicated by the cross hairs of the reticle 8'. The sphere 4' imprinted with geographic information 17' is mounted on an axle element 2' at the south pole with a pivot 32' at the north pole. The sphere and axle rotate together. The axle is rotatably supported by the two bearings 33 within the base. A rotary position first sensor 10' sends a signal through wire 13' to the computer circuit 19' indicating the longitudinal position of the reticle. A meridian member 5' encircles the sphere and supports the pivot 32'. The reticle is mounted on a circular element 34 that is concentric with meridian member 5' and that slides within a track on member 5'. A second sensor 11' engages the element 34 and rotates when reticle and element 34 move, sending a signal representative of the latitude of the reticle through wire 14' to the circuit 19'. The circuit 19' selects from the memory 12' a particular detailed map 16' of the selected area for display on the display 15'. A clock circuit 29' provides time for time display 31. Electric power is provided by battery 35.

Referring now to Fig. 5, another embodiment 18'' of the invention is shown in which an arcuate support 36 is affixed to a base 37. The display panel 38 is mounted on top of arcuate support 36. The axle 40 of globe 39 is rotatably mounted on arcuate support 36 with rotary position sensor 41 sensing longitude information supplied to the control circuit 42 in the base. Rods 43 affixed to the base support a pivot 44 positioned in line with the center of the sphere. An indicator 45 positioned at the surface of the sphere is pivotally connected to the pivot 44 so that the indicator is maintained at the sphere surface as it moves in an arc concentric with the sphere along a meridian from south to north. Rotary position sensor 46 provides a signal indicative of the latitude position of the indicator to the control circuit. The control circuit selects from the memory a detail map of the area beneath the indicator to display on the display. Alternatively, the display may not be attached to the assembly, and may take the form of a video projector, a computer, and the like (not shown).

Referring now to Fig. 6, another embodiment 18''' of the invention is shown. Extending upward from the base 47 is a support element 48. Pivots 49 support a ring member 50 that encircles globe 51. At a first location 52 on ring member 50 a pivot 53 supports a first end 54 of the axle element 55, and at a second location 56 on member 50 a second pivot 57 supports a second end 58 of the axle element. The axle element 55 may be comprised of two short aligned segments. A rotary sensor 59 provides a signal related to the rotation of the globe about its axis, longitude data. An indicator 60 in the form of a light beam from a light emitting diode 63 is focused on the globe surface. Diode 63 is affixed at the end of a rigid rod 61 extending upward from the base.

A rotary sensor 62 senses the rotary position of the ring member as the globe is moved under the indicator along a north south meridian for latitude data. The signals from the two sensors are applied as in the earlier embodiments. The display 64 may comprise a printer.

Referring now to Figs. 7-10 another embodiment of the invention is shown in which the latitude and longitude sensing is entirely within the globe. And, when the globe transmits some light through its walls, even the indicator selecting a particular location on the globe may be contained within the globe. With this embodiment, the user may rotate the globe on its axis and swivel the axis on pivots to move a light spot emanating from within the globe to a desired location on the globe. That area will then be displayed in detail on the video display.

This embodiment uses digital optical sensing, but other angular sensing means well known in the art may be used as well.


A globe 65 may be made of a light transmitting material such as plastic. It rotates about an axle 66 passing through the north and south poles. Rotary bearings 67 hold the globe in place on the axle while permitting free rotation of the globe. The axle is fixed on the ring 68. The ring 68 swivels on pivots 69 that are affixed to the arcuate support member 70 that is mounted on the base 71. The mechanisms for providing latitude and longitude information as well as the indicator light beam all within the globe are best seen in Figs. 8-10. A clear transparent disc 72 is affixed to the inside surface 77 of globe 65 by tabs 76. Nine rows of opaque marks 73 with progressively increasing numbers of marks having 256 in the outermost row on the disc 72 are provided for binary angle detection in a manner well known in the art. The marks are not complete on the drawing. A bar 75 affixed to axle 66 has nine photo detectors 74. These sense when a mark or a space between marks is at the detector. The result of the information from the detectors indicates the rotary position of the globe relative to the base (or longitude) to one five hundred and twelfth of a circle. This longitude information signal is passed to electronics (not shown) in the base and the detail information is displayed at monitor 79.

Affixed to the axle vertically is a similarly marked second transparent disc 78 (marks not shown) for deriving latitude information. An equatorial bar 83 is affixed at right angles to the axle at the equator of the globe. A sensing bar 80 rotates freely on the bar 83. It is provided with a row of photo detectors 81 to sense the presence or absence of marks on the disc. A weight 84 at the end of bar 80 ensures that the bar will be vertical when the axle is tilted to a greater angle than that subtended by the disc 75. The disc 75 is preferably located at about 60 degrees south latitude. Because there is little detail to be displayed in the antarctic area, that will not generally be missed. Stops 85 may limit bar 80 motion. The latitude signal from the sensors is transmitted by wire to electronics in the base as for the longitude information. A beam of light 86 may be provided by light emitter 87 on the end of bar 80 to fall on the globe at the site selected by the user. The interior of the globe is lighted by a number of light emitting diodes 88 to enable the detectors to read the marks on the discs.



1/10


FIG. 1

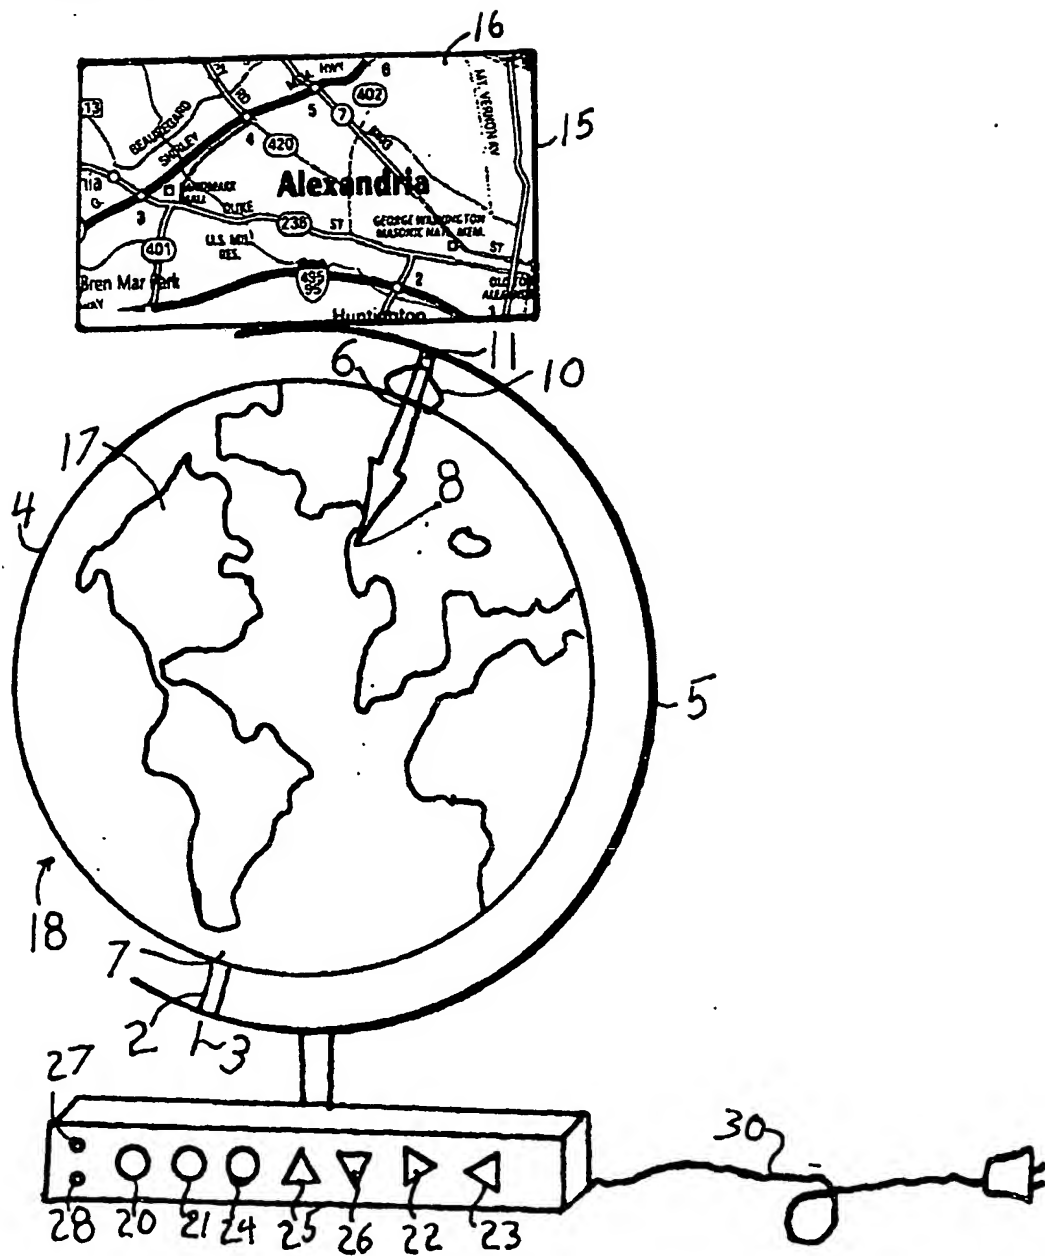



2/10

FIG. 2

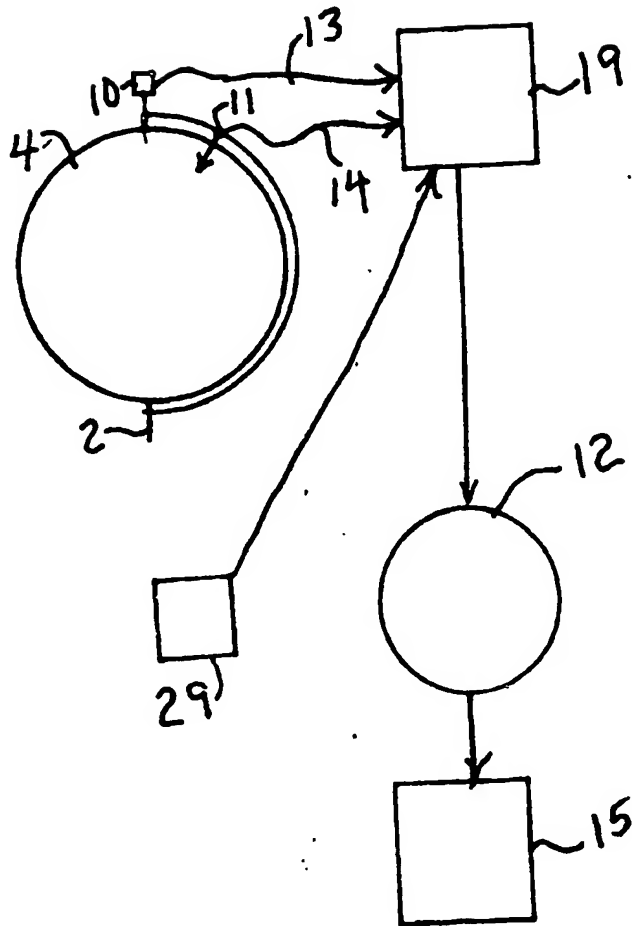

3/10

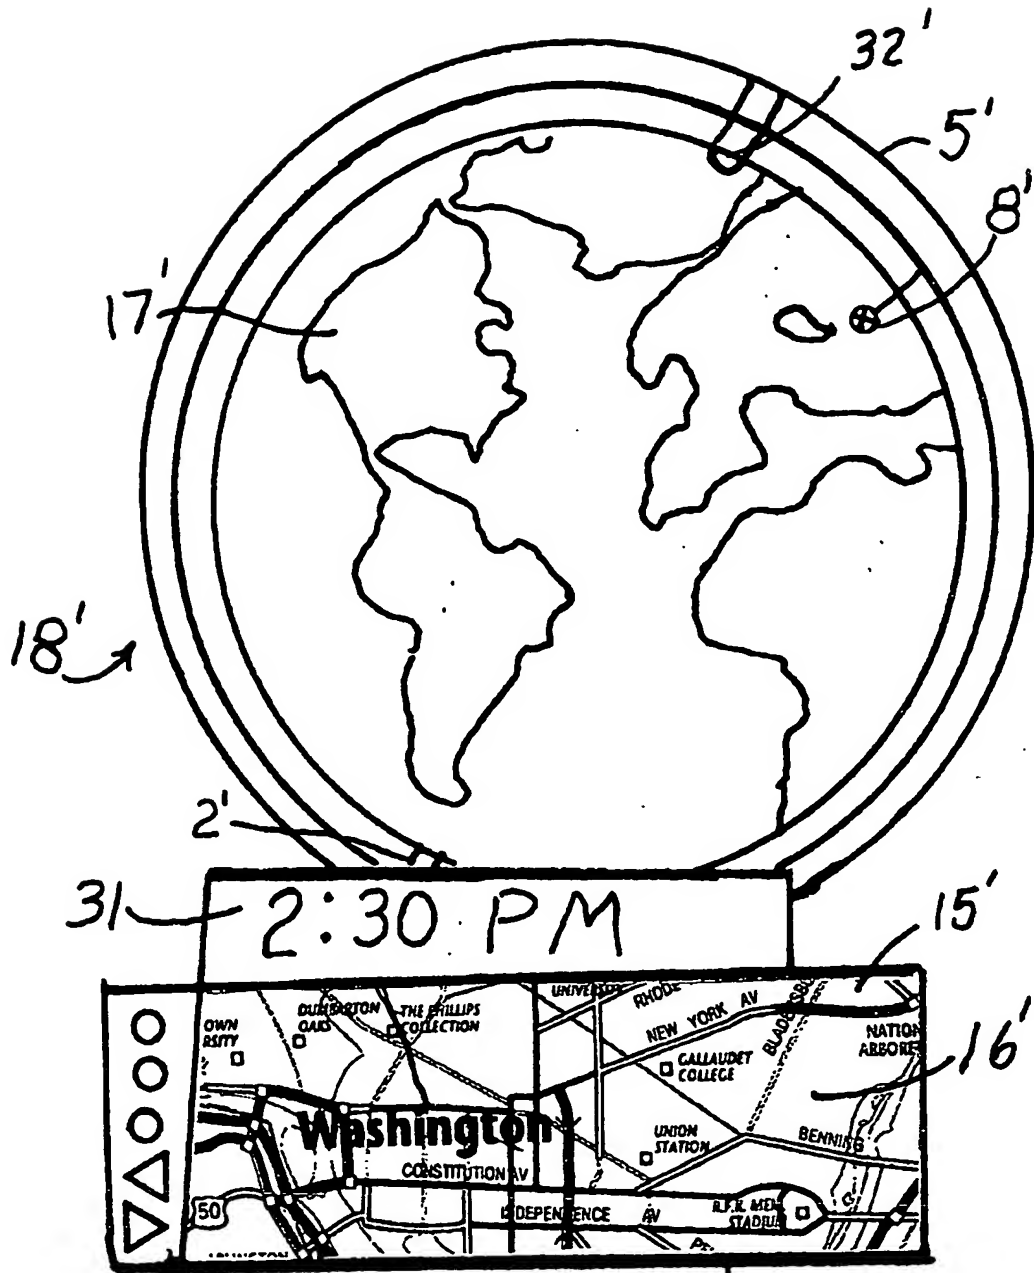


FIG. 3

4/10


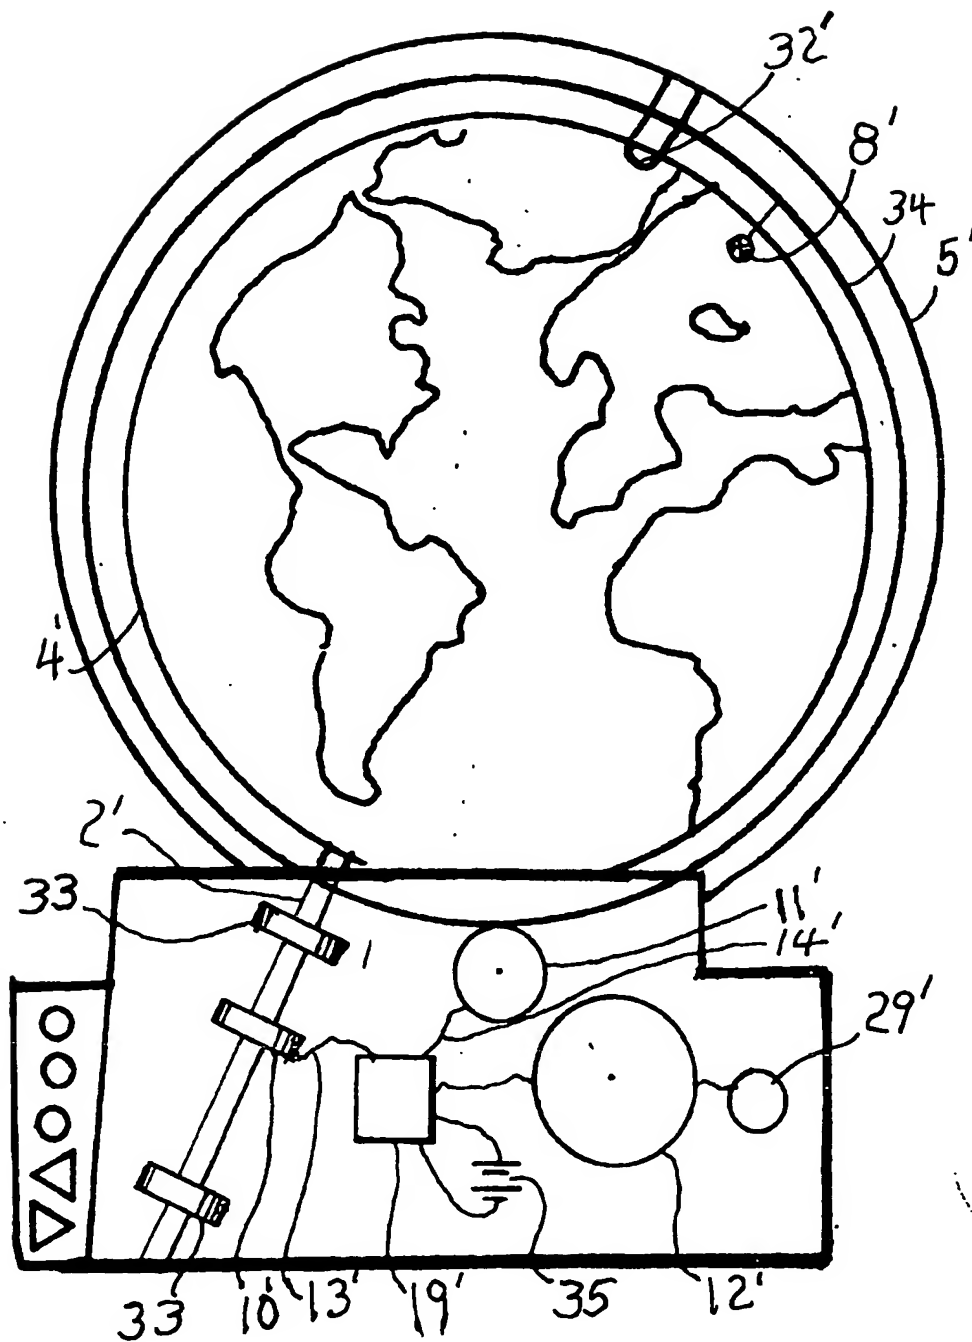



FIG.4

• •

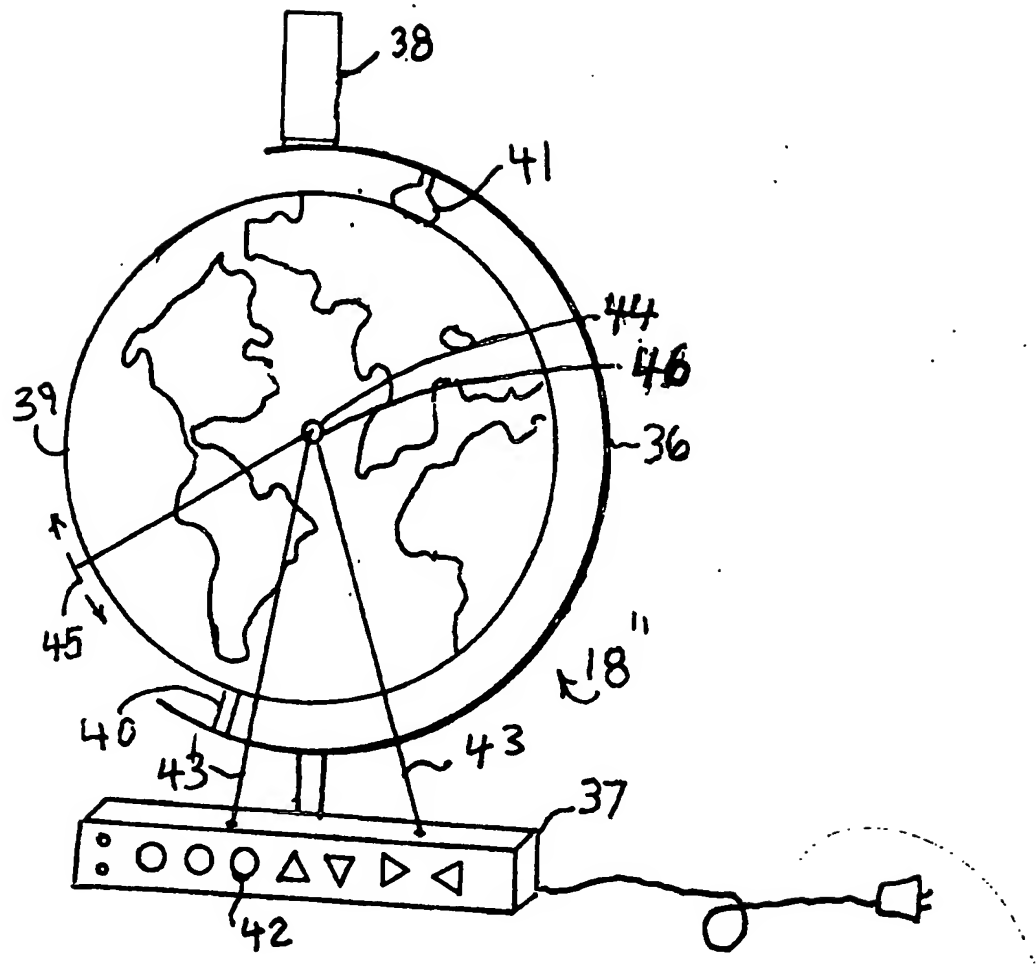

**FIG. 5**


**6/10**

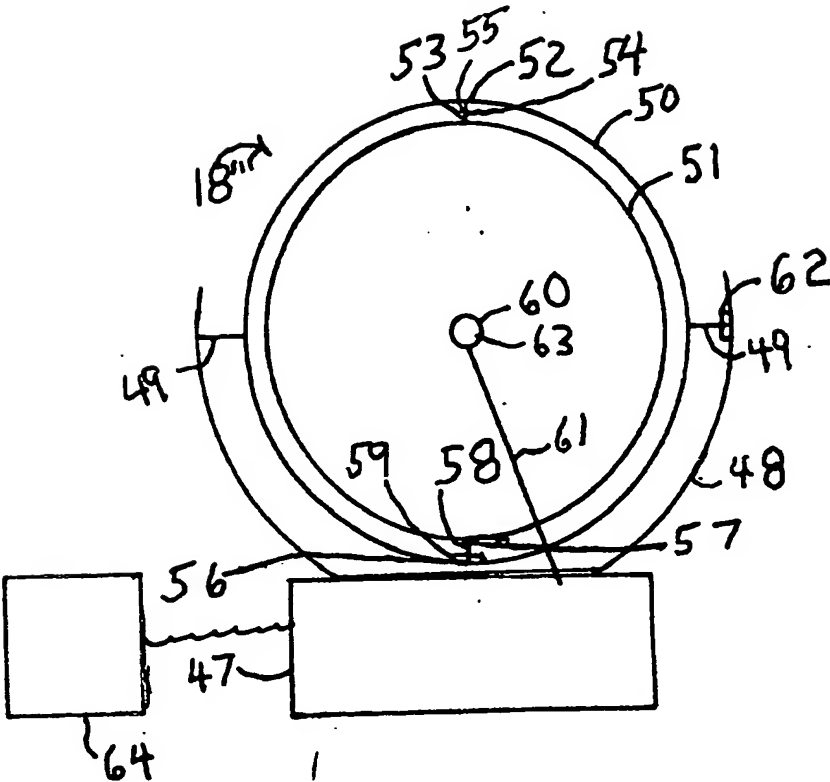

**FIG. 6**

7/101

FIG. 7

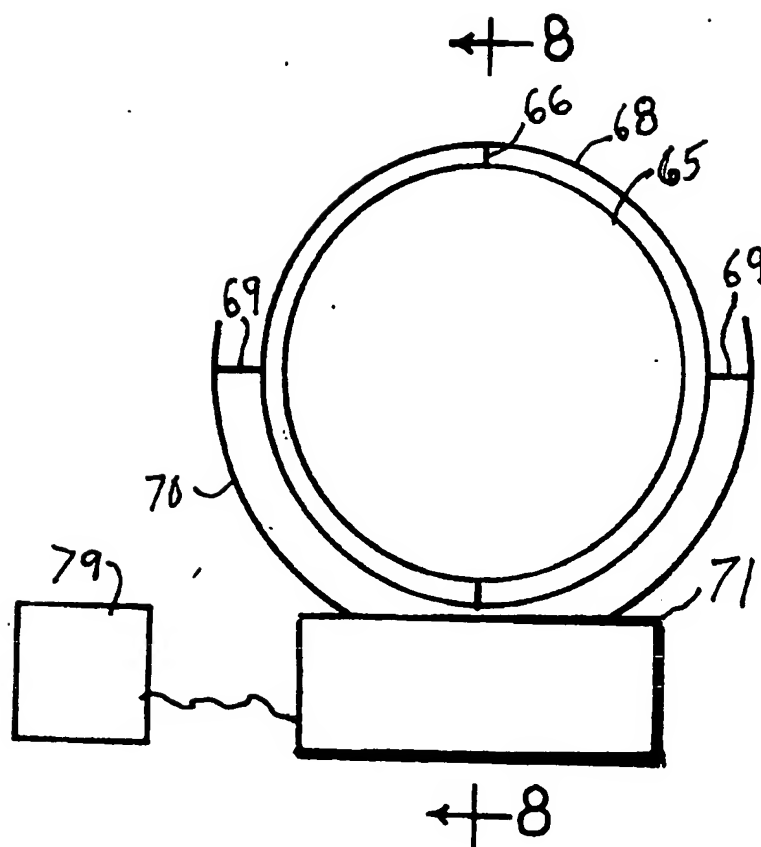

8/10

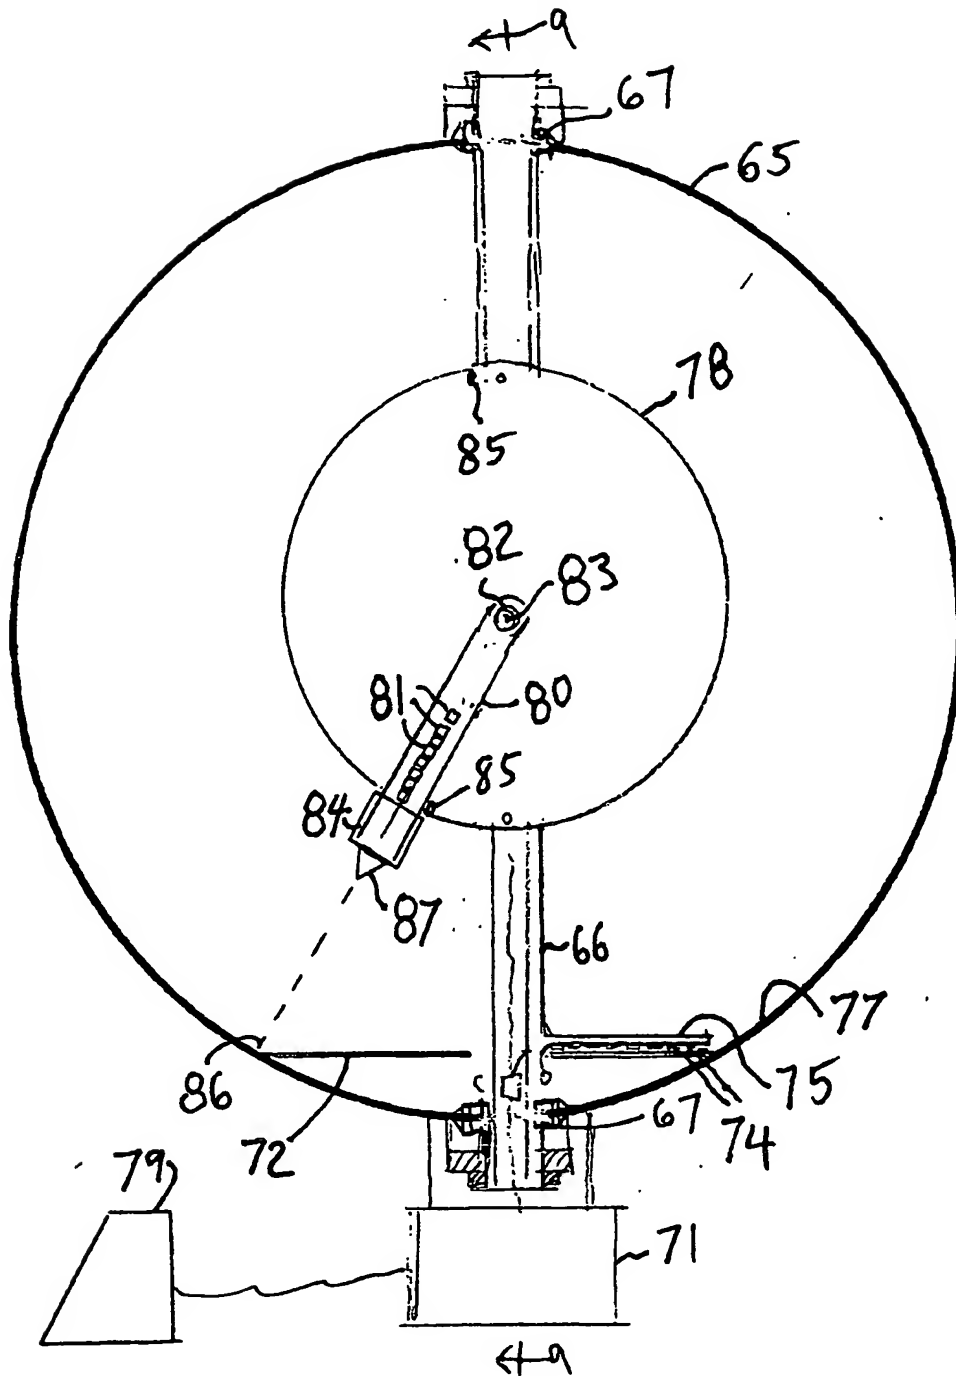


FIG.8



9/10


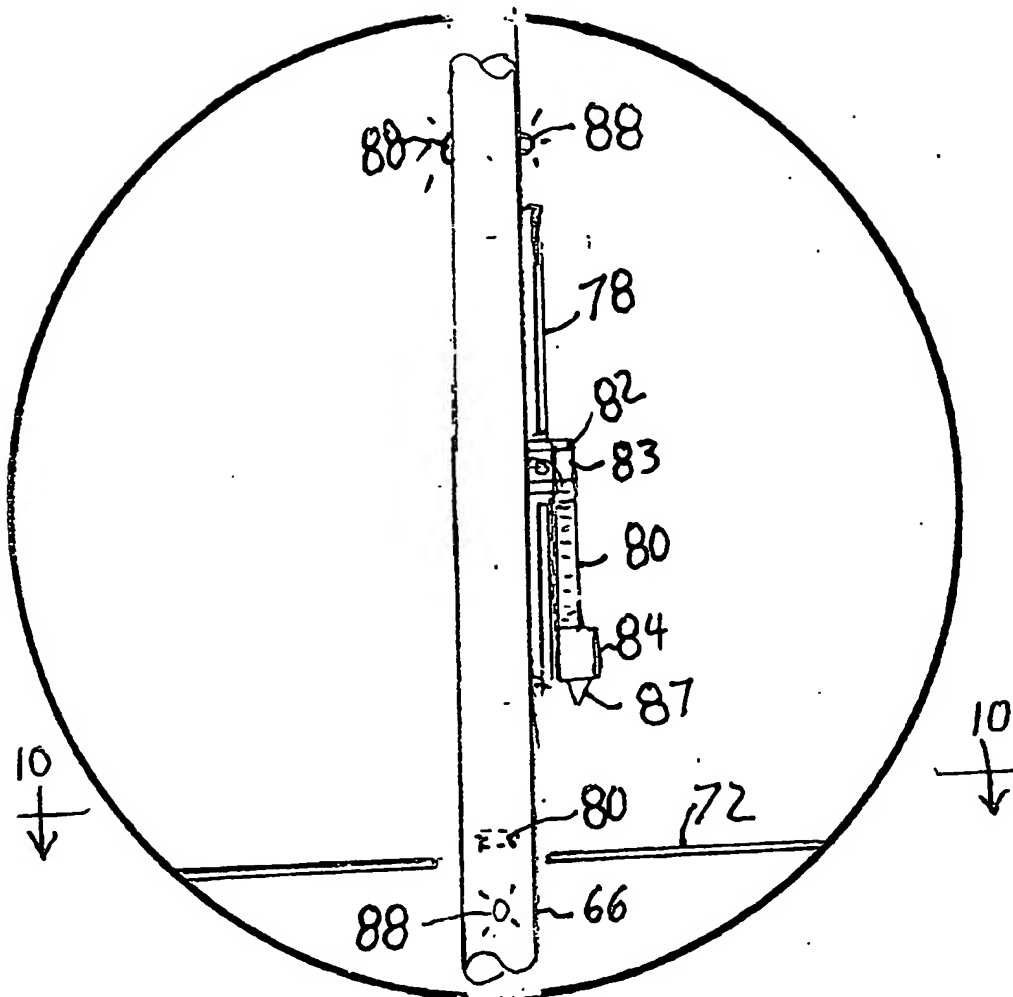


FIG. 9

**10/10**

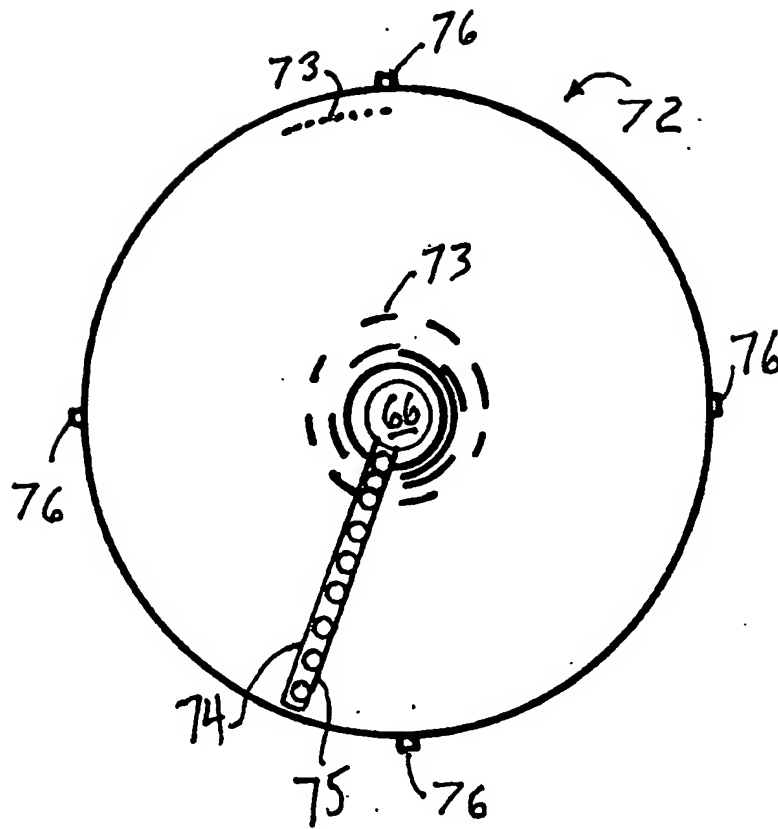

**FIG. 10**

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/034289

International filing date: 18 October 2004 (18.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/589,366  
Filing date: 20 July 2004 (20.07.2004)

Date of receipt at the International Bureau: 18 November 2004 (18.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**Box No. VIII (iv) DECLARATION: INVENTORSHIP** (only for the purposes of the designation of the United States of America)  
*The declaration must conform to the following standardized wording provided for in Section 214; see Notes to Boxes Nos. VIII, VIII (i) to (iv) (in general) and the specific Notes to Box No. VIII (iv). If this Box is not used, this sheet should not be included in the request.*

**Declaration of inventorship (Rules 4.17(iv) and 51bis.1(a)(iv))  
for the purposes of the designation of the United States of America:**

I hereby declare that I believe I am the original, first and sole (if only one inventor is listed below) or joint (if more than one inventor is listed below) inventor of the subject matter which is claimed and for which a patent is sought.

This declaration is directed to the international application of which it forms a part (if filing declaration with application).

This declaration is directed to international application No. PCT/..... (if furnishing declaration pursuant to Rule 26ter).

I hereby declare that my residence, mailing address, and citizenship are as stated next to my name.

I hereby state that I have reviewed and understand the contents of the above-identified international application, including the claims of said application. I have identified in the request of said application, in compliance with PCT Rule 4.10, any claim to foreign priority, and I have identified below, under the heading "Prior Applications," by application number, country or Member of the World Trade Organization, day, month and year of filing, any application for a patent or inventor's certificate filed in a country other than the United States of America, including any PCT international application designating at least one country other than the United States of America, having a filing date before that of the application on which foreign priority is claimed.

Prior Applications: .....

I hereby acknowledge the duty to disclose information that is known by me to be material to patentability as defined by 37 C.F.R. § 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the PCT international filing date of the continuation-in-part application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name: ..... BLUM, ALVIN S. .....

Residence: ..... FORT LAUDERDALE, FLORIDA .....  
(city and either US state, if applicable, or country)

Mailing Address: ..... 2350 DEL MAR PLACE .....  
FORT LAUDERDALE, FL 33301 .....

Citizenship: ..... U. S. A. .....

Inventor's Signature: ..... Alvin S. Blum .....  
(if not contained in the request, or if declaration is corrected or added under Rule 26ter after the filing of the international application. The signature must be that of the inventor, not that of the agent)

Date: ..... 17 OCTOBER, 2004 .....  
(of signature which is not contained in the request, or of the declaration that is corrected or added under Rule 26ter after the filing of the international application)

Name: .....

Residence: .....  
(city and either US state, if applicable, or country)

Mailing Address: .....

Citizenship: .....

Inventor's Signature: .....  
(if not contained in the request, or if declaration is corrected or added under Rule 26ter after the filing of the international application. The signature must be that of the inventor, not that of the agent)

Date: .....  
(of signature which is not contained in the request, or of the declaration that is corrected or added under Rule 26ter after the filing of the international application)

☐ This declaration is continued on the following sheet, "Continuation of Box No. VIII (iv)".

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**